


PRODUCT SPECIFICATION

	Grade Availability by GSM															Units	Method	Tolerance	
	230	250	260	270	285	300	320	330	340	350	360	370	400	420	450				
GSM	230	250	260	270	285	300	320	330	340	350	360	370	400	420	450	g/m ²	T 110 om-98	±3%	
Caliper	265	288	300	318	336	360	390	403	425	437	450	470	520	546	594	micron	T 411 om-97	±5%	
Bulk	1.15	1.15	1.15	1.18	1.18	1.2	1.22	1.22	1.25	1.25	1.25	1.27	1.3	1.3	1.32	cc/gm	-	±5%	
Moisture	6.5	6.5	6.5	6.5	6.5	7	7	7	7	7	7	7	7.5	7.5	8	%	T 412 om-94	±1%	
Stiffness (Taber)	MD	45	70	76	85	100	125	150	160	170	180	190	200	260	270	340	gm.cm	T 489 om-99	±10%
	CD	20	28	31	35	40	50	54	59	62	64	66	70	93	96	130			
	GM	30	44	49	55	63	79	90	97	103	107	112	118	156	161	210			
Roughness PPS	2.5 max															microns	T 555 om-99	-	
Gloss at 75°	40															%	T 480 om-99	±5	
Internal Bond	>200															Kpa	T 541 om-99	-	
IGT Dry Pick	>1.0															m/sec	ISO 3782	-	
Cobb	TOP	50 max															g/m ²	T 441 om-98	-
	BOTTOM	100 max																	
K&N Test	15															%	-	±3	

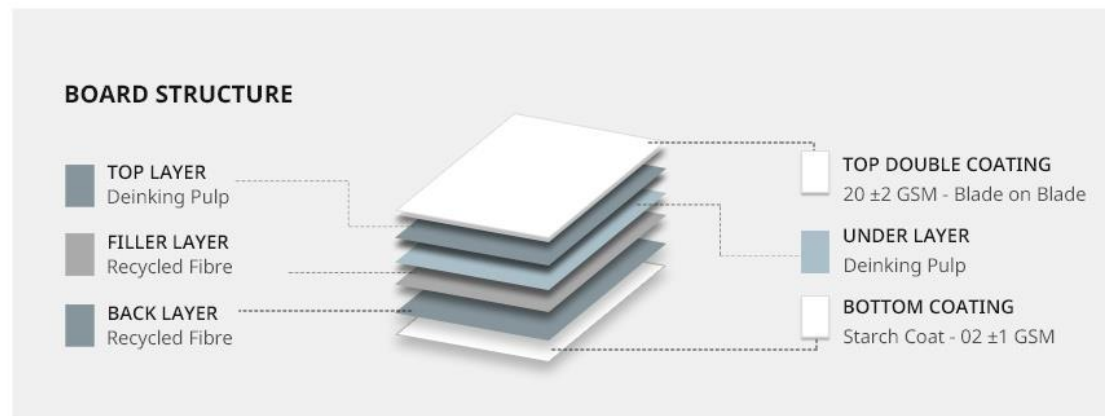

DECKLE

MACHINE 1	Min. : 284 cm	Max.: 290 cm
MACHINE 2	Min. : 204 cm	Max.: 212 cm

- ### APPLICATIONS
- ✓ High Speed Printing Job
 - ✓ Packaging board
 - ✓ Recommended for multi-colour printing on :
 - a) Letter Press
 - b) Offset
 - c) Roto gravure

PACKING INFORMATION

REELS	SHEETS	PALLETS
Width: 400 - 2900 mm	Min. Size: 300 x 560 mm	Min. Height: 1100 mm
Core Inner Dia: 76 mm/3" & 150 mm/6"	Max. Size: 2400 x 1650 mm	Max. Height: 1300 mm

For more information, please contact your Khanna Paper Mills representative or visit our website at www.khannapaper.com

This information is subject to modification without notification.



Khanna Paper Mills Limited

